coating 141151



sputtered optical coating

HRs,p(0-10°,1030nm)>99.95% GDD-Rp(0-10°,1030nm)=-1000(±200)fs²

supplied with GDD-measurement AOI 6°

fig. 1 calculated R(0°)

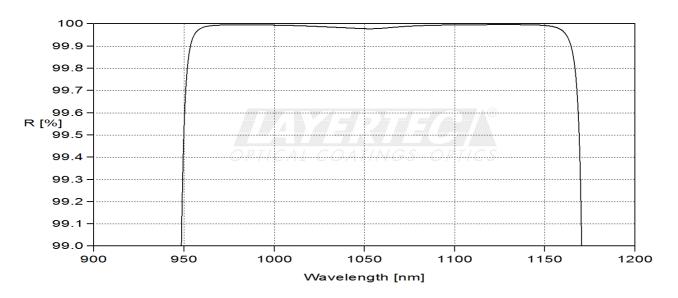


fig. 2 calculated GDD-R

